


Elcometer 123 Surface Profile Gauge

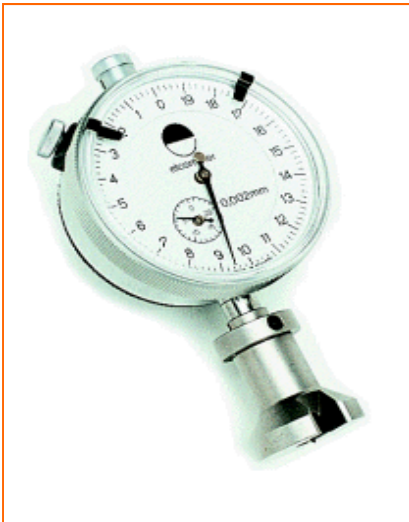

Elcometer 123 Surface Profile Gauge

Elcometer 123 Surface Profile Gauge

This is an easy to use gauge that measures the point-to-valley height of a blast cleaned surface.

The average of a series of measurements provides an indication of the surface roughness and allows the surfaces to be compared as blasting proceeds.

- Simple and low cost
- Metric and Imperial Versions

Surface Profile

The proper and effective preparation of a surface prior to coating is essential. Making sure that the correct roughness – or profile – has been generated is essential.

If the profile is too low, the adhesion of the coating to the surface will be reduced. Too high and there is the danger that the profile peaks will remain uncoated – allowing rust spots to occur.

At a glance

- *Analogue surface profile gauge used to measure surface roughness.*
- *Place the gauge on the gloss to zero and then measure your surface.*

Can be used in accordance with:	
ASTM D 4417- B	SABS 772

	Elcometer 123	
Range	0 - 1000mm 0 – 40 mils	
Scale Resolution	2mm 0.1 mils	
Dimensions (nominal)	105 x 55 x 25mm 4.1 x 2.2 x 1"	
Weight	235g 8oz	
Power	Not Required	
Part Numbers	Metric	E123A--M-
	Imperial	E123A--E-

Related products



Elcometer 223

The Elcometer 223 is a battery operated digital surface profile gauge which measures the peak-to-valley height of a surface in a similar way to the Elcometer 123 analogue equivalent, but with the added benefit of a direct RS232 output for data logging.



Elcometer 101/45

Whereas comparators allow the estimation of surface roughness by both touch and sight, the Elcometer 101 estimates the roughness of iron and steel surfaces. Its scale indicates the suitability of the surface for paints, metal coatings and hard metal coatings.



Elcometer 122

The Elcometer 122 testex tape allows the user to measure the peak-to-valley height of the profile and record it. Testex tape consists of foam with a non-compressible backing. The foam side is rubbed into the surface providing a permanent mould of the profile. The Elcometer 124 Thickness Gauge is then used to measure the peak-to-valley height of the profile formed.



Elcometer 125

Surface comparators allow the estimation of surface roughness by both touch and sight. These simple roughness gauges consist of 4 blasted profiles of varying roughness and are available either in a grit blasted or a shot blasted version.



Elcometer 129

Similar to the Elcometer 125, the Elcometer 129 roughness comparators are available in two models: The Elcometer 129 Rubert is available in grit and shot versions whereas the Elcometer 129 Rugotest includes the shot and grit profiles on the same block.



Elcometer 127

These comparators from Keane-Tator are designed to be used with a magnifier. Consisting of 5 blasted profiles on displayed with the roughness value on each disc. In the middle of the disc there is a hole for the comparison to be undertaken using the magnifier. Sand, shot or grit versions available.



Elcometer 7060

Designed for measurement of machined profiles, these gauges measure the profile by the use of a motorised travel of the sensor which passes over the surface to be tested. A range of different roughness values can be displayed on the LCD.

ENGLAND

Elcometer Ltd
Edge Lane
Manchester M43 6BU

Tel: +44 (0)161 371 6000
Fax: +44 (0)161 371 6010
e-mail: sales@elcometer.com
www.elcometer.com

USA

Elcometer Inc
1893 Rochester Industrial Drive
Rochester Hills Michigan 48309

Tel: +1 248 650 0500
Toll Free: 800 521 0635
Fax: +1 248 650 0501
e-mail: inc@elcometer.com
www.elcometer.com

CANADA

Elcometer Ltd
PO Box 622, 401 Ouelette Avenue
Windsor, Ontario N9A 6N4

Tel: +1 248 650 0500
Toll Free: 800 521 0635
Fax: +1 248 650 0501
e-mail: ca_info@elcometer.com
www.elcometer.com

ASIA & THE FAR EAST

Elcometer (Asia) Pte Ltd
896 Dunearn Rd
Sime Darby Centre #3-09
Singapore 589472,
Republic of Singapore

Tel: +65 6462 2822
Fax: +65 6462 2860
e-mail: asia@elcometer.com
www.elcometer.com

BELGIUM

Elcometer SA
Rue Vallée 13
B-4681 Hermalle /s Argenteau

Tel: +32 (0)4 379 96 10
Fax: +32 (0)4 374 06 03
e-mail: be_info@elcometer.be
www.elcometer.be

FRANCE

Elcometer Sarl
97 Route de Chécý
45430 BOU

Tel: +33 (0)2 38 86 33 44
Fax: +33 (0)2 38 91 37 66
e-mail: fr_info@elcometer.fr
www.elcometer.fr

GERMANY

Elcometer Instruments GmbH
Ulmer Strasse 68
D-73431 Aalen

Tel: +49 (0)7361 52806 0
Fax: +49 (0)7361 52806 77
e-mail: de_info@elcometer.de
www.elcometer.de