


Elcometer 2080 Meier Gauge

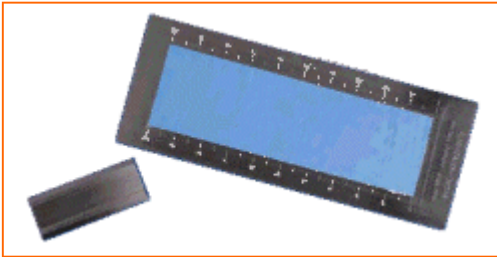

Elcometer 2080 Meier Gauge

Elcometer 2080 Meier Gauge

Special gauge, made of hardened stainless steel to test drying, shrinkage or cracking of coatings or similar products, with a sloping groove of 60 mm wide and 200 mm long, and 1, 2 or 3 mm maximum depth.

The products are applied to the whole area of the groove.

At a glance

- *Hardened stainless steel gauge.*
- *Tests drying, shrinkage or cracking of coatings.*
- *Sloping groove of 60mm wide and 200mm long.*
- *1, 2 or 3mm maximum depth*

Fineness of grind

From the development of coatings and inks in the laboratory to testing during the production process, quick and precise measurement of the particle size of the material - be it pigments or other similar materials - is one of the essential measurement techniques required for reliable and repeatable results.

Fineness of grind gauges comprise of stainless steel blocks in which either one or two channels are precision ground in a uniformly increasing depth from zero at one end to a specified depth at the other, identified by the scale on the gauge.

Elcometer takes special care in its manufacturing to ensure that the highest level of precision and quality is maintained for all their gauges in order to comply with the requirements of the industries where the grinding process is involved, particularly in the fields of wet paints and powder, varnishes, printing inks and the cosmetics industry.

Model	µm	mils	Number of Grooves	Groove Width		Groove Length		Graduation (mm)	Part Number	
				mm	inches	mm	inches		Metric	Imperial
Elcometer 2080/1	0-1000	0 - 40	1	60	2.36	200	7.87	0.05	K0002080M001	K0US2080M001
Elcometer 2080/2	0-2000	0 - 80	1	60	2.36	200	7.87	0.10	K0002080M002	K0US2080M002
Elcometer 2080/3	0-3000	-	1	60	2.36	200	7.87	0.15	K0002080M003	-

Related products



Elcometer 2041

These precision instruments are used to determine particle size and fineness of grind of many materials - including paints, pigments, inks and even chocolate!



Elcometer 5500

This simple device uses ball type stylus which turns in a circle at a set rate. The drying time is evaluated from the condition of the trace and the time is measured using a template.



Elcometer 5100

Made entirely of anodised aluminium, the permeability cup is used to determine the permeability of films of paint, varnish, plastic, cellophane, etc.

ENGLAND

Elcometer Ltd
Edge Lane
Manchester M43 6BU

Tel: +44 (0)161 371 6000
Fax: +44 (0)161 371 6010
e-mail: sales@elcometer.com
www.elcometer.com

USA

Elcometer Inc
1893 Rochester Industrial Drive
Rochester Hills Michigan 48309

Tel: +1 248 650 0500
Toll Free: 800 521 0635
Fax: +1 248 650 0501
e-mail: inc@elcometer.com
www.elcometer.com

CANADA

Elcometer Ltd
PO Box 622, 401 Ouelette Avenue
Windsor, Ontario N9A 6N4

Tel: +1 248 650 0500
Toll Free: 800 521 0635
Fax: +1 248 650 0501
e-mail: ca_info@elcometer.com
www.elcometer.com

ASIA & THE FAR EAST

Elcometer (Asia) Pte Ltd
896 Dunearn Rd
Sime Darby Centre #3-09
Singapore 589472,
Republic of Singapore

Tel: +65 6462 2822
Fax: +65 6462 2860
e-mail: asia@elcometer.com
www.elcometer.com

BELGIUM

Elcometer SA
Rue Vallée 13
B-4681 Hermalle /s Argenteau

Tel: +32 (0)4 379 96 10
Fax: +32 (0)4 374 06 03
e-mail: be_info@elcometer.be
www.elcometer.be

FRANCE

Elcometer Sarl
97 Route de Chécý
45430 BOU

Tel: +33 (0)2 38 86 33 44
Fax: +33 (0)2 38 91 37 66
e-mail: fr_info@elcometer.fr
www.elcometer.fr

GERMANY

Elcometer Instruments GmbH
Ulmer Strasse 68
D-73431 Aalen

Tel: +49 (0)7361 52806 0
Fax: +49 (0)7361 52806 77
e-mail: de_info@elcometer.de
www.elcometer.de